



REGULATORY AGENCY APPROVALS



E93779



LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1



FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

0.6 kV, BIL 10 kV full wave.

**CONTINUOUS THERMAL
CURRENT RATING FACTOR:**

1.33 at 30°C. amb., 1.0 at 55°C. amb.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut, for ratios up to 25:5 and 1/4-20 studs for higher ratios.

Order mounting bracket kit No. 0221B00777

Approximate weight 4 lbs.

The **Model 190** is a low ratio primary current transformer, suitable for primary currents up to 50 amperes. The table below lists the most common current ratings.

CATALOG NUMBER	V.A. ± 1% CLASS	ANSI METERING CLASS AT 60HZ				
		B0.1	B0.2	B0.5	B0.9	B1.8
190-2-XXX	12.5	0.6	0.6	1.2	2.4	—
190-4-XXX	30.0	0.3	0.3	0.3	0.6	1.2

RATIO	1:5	2.5:5	5:5	7.5:5	10:5	15:5	20:5	25:5	30:5	40:5	50:5
SUFFIX	001	0025	005	0075	010	015	020	025	030	040	050

* * *
* 1/4-20 stud terminals


Model 190 Wound Primary & 190X Auxiliary Transformer

ANSI Metering Class: 0.3 B0.5

The **Model 190X** is an auxiliary transformer for use in the secondary of main current transformers to change the ratio for metering applications. Since the **Model 190X** is used in the secondary of another current transformer it has no voltage rating. It is given a 2500 volt 60Hz high potential test. It is designed to be used on circuits not to exceed 600 volts to ground or between windings.

CATALOG NUMBER	CURRENT RATIO	CATALOG NUMBER	CURRENT RATIO
190X0100	5:0.1	190X6250	5:6.25
190X0200	5:0.2	190X7500	5:7.5
190X0250	5:0.25	190X8000	5:8
190X0500	5:0.5	190X10000	5:10
190X0625	5:0.625	190X12500	5:12.5
190X1000	5:1	190X15000	5:15
190X1250	5:1.25	190X1500-5	1.5:5
190X1667	5:1.667	190X1667-5	1.667:5
190X2000	5:2	190X2500-5	2.5:5
190X2395	5:2.395	190X2875-5	2.875:5
190X2500	5:2.5	190X7500-5	7.5:5
190X2890	5:2.89	190X10500-5	10.5:5
190X3000	5:3	190X0500-1	0.5:1
190X3330	5:3.33	190X0923-1	0.923:1
190X3750	5:3.75	190X0400-10	0.4:10
190X4000	5:4	190XSUM-2 **	5+5:5
190X5000	5:5	190XSUM-3 **	5+5+5:5
190X5330	5:5.330	190XSUM-4 **	5+5+5+5:5
		190XSUM-5 **	5+5+5+5+5:5

** The circuits of up to five secondaries may be totalized. Equal or unequal line current transformers can be summed with this transformer. Advise the ratios of the line current transformers to be totalized for unequal ratios. Output terminals are X1-X2.

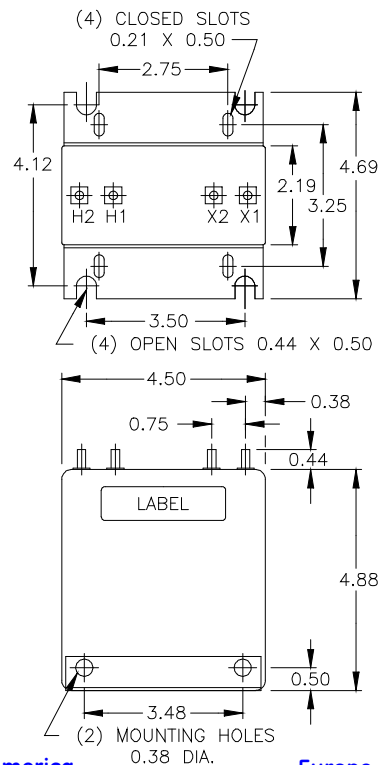

USA, Canada, Asia, Latin America

Tel: +1-800-547-8629

Fax: +1-905-201-2455

e-mail: sales.multilin@ge.com

Europe, Middle East, Africa

Tel: +34-94-485-88-00

Fax: +34-94-485-88-45

e-mail: gemultilin.euro@ge.com

Please refer to our website www.GEMultilin.com for more detailed contact information